

LEIZHAN[®]

磊展机械

▪ LEIZHAN MACHINE ▪



**PROFESSIONAL TECHNOLOGY
SERVICE FOR PAPERMAKING INDUSTRY**

**ZHENGZHOU LEIZHAN TECHNOLOGY
PAPER MACHINERY CO., LTD.**

Add: Hetun Industrial Area, Dawei Town, Zhengzhou City,
Henan Province, China, 452383
Tel: +86 371 55129198
Fax: +86 371 86138029
Email: jianpo@zzlzkj.com.cn
<http://www.papermaking-equipment.com>
<http://www.zzlzkj.en.alibaba.com>

**ZHENGZHOU LEIZHAN TECHNOLOGY
PAPER MACHINERY CO., LTD**



Shaolin Temple

**How Happy We Are
To Have Friends From Afar!**

ZHENGZHOU LEIZHAN TECHNOLOGY PAPER MACHINERY CO., LTD.

CATALOGUE OF PRODUCTS

Company Profile.....	04
Company Certificate.....	06
Workshop.....	08
Customers Visiting.....	09
Delivery Site.....	11
Working Site.....	12
Product Components.....	13

PULPING MACHINE

BFW Series Chain Conveyor.....	16
SBJ Series Bale Breaker.....	17
ZG Series Drum Pulper.....	18
ZDSD Series D Type Hydrapulper.....	19
ZDSG H.C. Hydrapulper.....	21
ZDSZ Series M.C. Hydrapulper.....	22
ZDS Series Vertical Hydrapulper.....	23
ZSF Series Hydrapulper.....	24
ZST Series Drum Screen.....	25
ZTS Series Ragger.....	26
Rope Cutter.....	27
Grapple.....	27
ZSC Series High Density Cleaner.....	28
ZDFD Series Single Effect Fiber Separator.....	29
ZDF Series Single Fiber Separator.....	30
PZ Series Reject Separator.....	31
ZSK Series Vibrating Screen.....	32
KH Series Low Density Cleaner.....	33
ZNS Series M.C. Pressure Screen.....	34
FQJ Light Impurity Separator.....	35
UV Series Up-flow Pressure Screen.....	36
NLS Inflow Pressure Screen.....	37
ZNP Series Disc Thickener.....	38
ZDP Series Double Disc Refiner.....	39
DD Series Double Disc Refiner.....	40
ZDJ Series Claffin Refiner.....	41
ZM Series Conical Refiner.....	42
ZFM Flotation Deinking Machine.....	43
ZNG High-speed Stock Washer.....	44
Dispersion System.....	45
ZNX Series Inclined Screw Thickener.....	46
ZNJ Series Screw Press Washer.....	47
ZRP Series Disc Disperser.....	48
ZDR Series Kneader.....	49
ZLS Series Heating Screw Conveyor.....	50
ZPT Series H.C. Bleaching Tower.....	51
ZPH Series Mid Consistency Mixer.....	52
ZPT Series M.C. Bleaching Tower.....	53
JB Series Agitator.....	54
HD Series Sludge Dewatering Machine.....	55
LXL-Z Series Two-phase Flow Pulp Pump.....	56
Main Specification.....	57

PAPER MACHINE

Kraft Liner Board Machine.....	62
Corrugated Paper Machine.....	63
High-grade Cultural Paper Machine.....	64
Living Paper Making Machine.....	65
Coating Board Paper Machine.....	66
Round Net Yarn Tube Paper Machine.....	67
Overfeed Rewinder.....	68
Paper Machine Spare Parts.....	69
Part Of Customer List.....	74



COMPANY INTRODUCE

Zhengzhou Leizhan Technology Paper Machinery Co., Ltd. is located in Hetun Industrial Area, Dawei Town, Henan Province, 50 km away from Zhengzhou city, nearby Chinese first temple in the west---Shaolin Temple. Leizhan is a professional manufacturer of pulp& paper equipments, which engaged in research and development, manufacture and sale, over 200 staffs, including 50 engineers and technicians. Annual production and processing capacity is more than US\$15000000.

Considering the market orientation, Leizhan is specialized in complete set of screening, slag removal, pulping and refining equipment. It has strong technical force, excellent numerical control processing machinery, and perfect detection means. This company has been certified for State ISO9001 Quality System Certification and owns 14 patents, also passed BV, TUV certification.

Company Certificate




Patent Certificate



Workshop



Customers Visiting

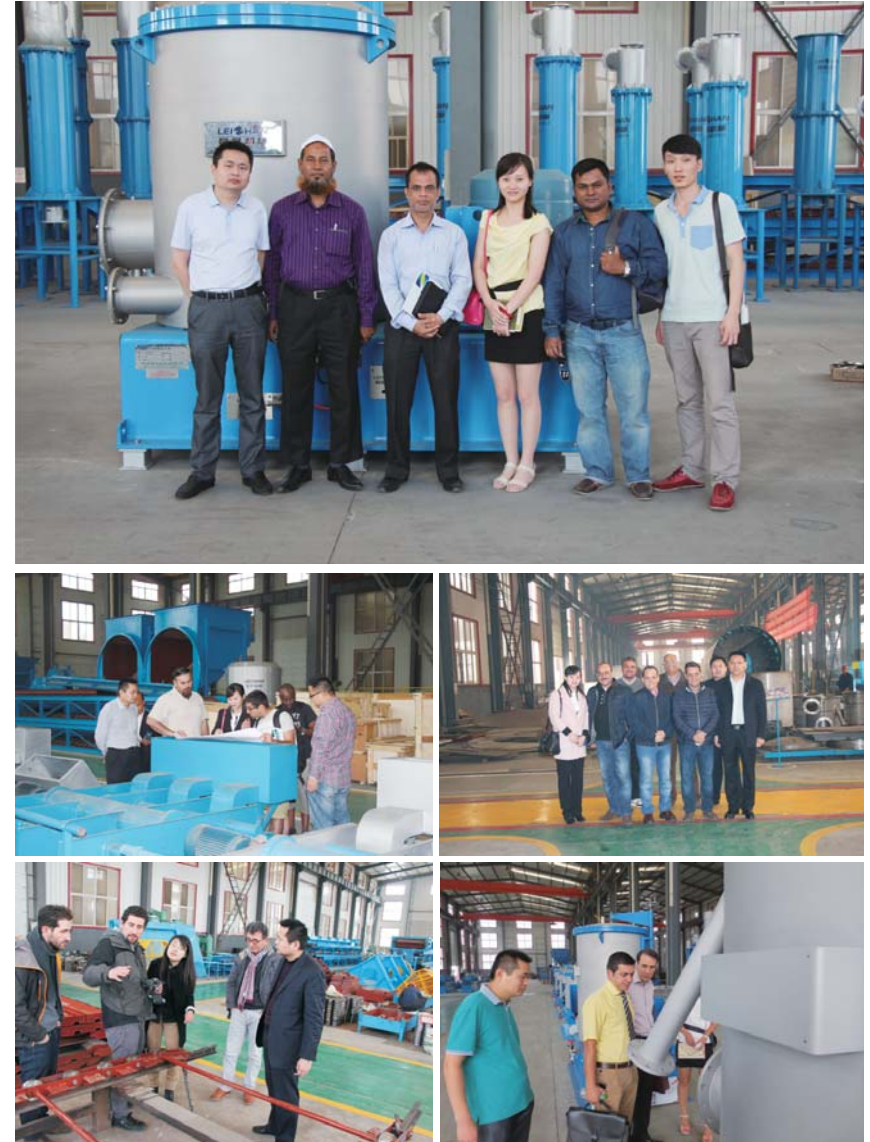

Customers Visiting



Delivery Site



Working Site



Product Components





PULPING MACHINE

ZHENGZHOU LEIZHAN
TECHNOLOGY
PAPER MACHINERY CO., LTD



BFW Series Chain Conveyor

Application&Feature

1. Mainly used for conveying various kinds of pulp board, waste paper in bulk and in bundle which can be horizontal conveyor or inclined conveyor(<30°).
2. Adopt specially made chain drive one-time impact stamping, trough plate to convey material, which has advantages of large capacity, low motor power, less wear, reliable operation and high efficiency.

Main Specification

Type	BFW							
Chain Plate Width (mm)	1200	1400	1600	1800	2000	2200	2400	2600
Feeding Capacity (m ³ /h)	60-220	80-255	95-300	110-345	140-390	160-430	200-500	240-600
Conveying Material	Waste Paper / Pulp Board							
Maxlimit Of Material (mm)	1000	1200	1400	1600	1800	2000	2200	2400
Motor Power(kw)	5.5	7.5	11	15	18.5	22-30	30-45	37-55



SBJ Series Bale Breaker

Application&Feature

1. Used for waste paper bales breaking and selecting.
2. The hole of drum can remove smaller impurities in the waste paper under dry condition.
3. To removal impurities can reduce wear to the following equipment, such as: pulper, cleaner, pulp pump, pipe, pressure screen, pulp refiner. So that the equipment can be protected.

Main Specification

Type	SBJ3000	SBJ3250	SBJ3500	SBJ3750	SBJ4000
Nominal Diameter (mm)	Φ3000	Φ3250	Φ3500	Φ3750	Φ4000
Processing Capacity(t/d)	220-600	260-750	300-900	330-1100	380-1200
Motor Power(kw)	18.5×2	22×2	30×2	30×2	37×2



ZG Series Drum Pulper

Application&Feature

1. Mainly used for continuous gentle pulping and coarse screening of waste paper under high consistency. Drum pulper can continuous pulp and preliminary screen, simplify process.
2. It can gently pulp under 14%-18% high consistency to uttermost maintain the physical property of fiber.
3. Low damage to impurities and high efficiency of deslagging reduce the following equipment burden.
4. Low energy consumption, reduce running cost, improve the competitiveness for per ton pulp.
5. Long pulping residence time, sufficient fiber relief, low rate fine fiber loss.
6. Few quick-wear parts, continuous pulping, low maintenance cost.

Main Specification

Type	ZG2500	ZG2750	ZG3000	ZG3250	ZG3500	ZG3750	ZG4000	ZG4250
Drum Diameter(mm)	Φ2500	Φ2750	Φ3000	Φ3250	Φ3500	Φ3750	Φ4000	Φ4250
Production Capacity (t/d)	70-120	140-200	200-300	240-400	400-600	550-800	750-1000	1000-1400
Working Consistency (%)	14-18							
Motor Power(kw)	132-160	160-200	280-315	315-400	560-630	630-800	800-1000	1000-1400



ZDSD Series D Type Hydrapulper


Application&Feature

1. New type energy-saving VOKES rotor strengthens hydraulic circulation and fiber relief.
2. D type structure changes slurry flow ways, make contact between pulp and rotor more quick and frequent. The mechanical action is enhanced, pulping time is shortened so that the capacity is improved.
3. Pulp chamber of rotor is higher than the undersurface of pulper barrel, form a low pressure area around rotor to collect heavy impurities, reduce wear to cutterhead and sieve plate. So that can prolong the rotor and sieve plate service life .
4. Adjustable gap between rotor and sieve plate ensures the pulping effect.
5. When D type hydrapulper work with hydrapurger, drum screen, ragger, rope cutter and grapple and form continuous pulping and deslagging system, the large light and heavy impurities in pulper can be rejected in time, which avoid pulping the impurities, reduce the following equipment burden. At the same time, it take less time to stop and clean, improve the whole system dealing capacity.


Main Specification

Type	ZDSD 23	ZDSD 24	ZDSD 25	ZDSD 26	ZDSD 27	ZDSD 28	ZDSD 29	ZDSD 30	ZDSD 31	ZDSD 32	ZDSD 33	ZDSD 34	ZDSD 35	ZDSD 36	ZDSD 37
Normal Volume(m³)	5	10	15	20	25	30	35	40	45	50	60	70	90	120	140
Consistency (%)	3-5														
Production Capacity(t/d)	30-60	40-100	80-120	140-180	180-230	230-280	270-320	300-370	350-400	400-450	460-550	550-650	650-800	800-1000	1000-1200
Motor Power(kw)	75	110	160	185	220	280	315	355	400	450	560	630	900	1100	1250

Disposition Drawing Of Breaking In Low Consistency And Continuous Impurity-removing System

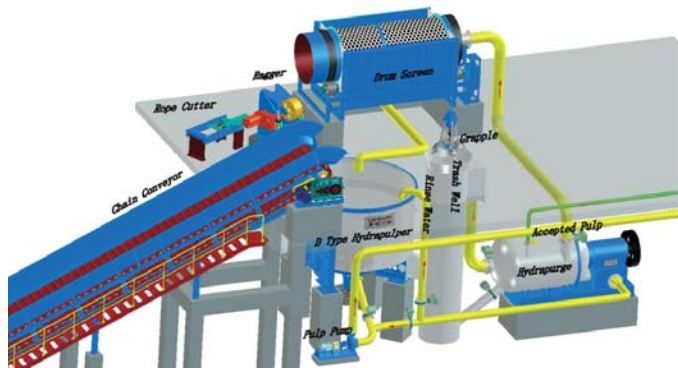

Disposition Drawing Of Breaking In High Consistency System

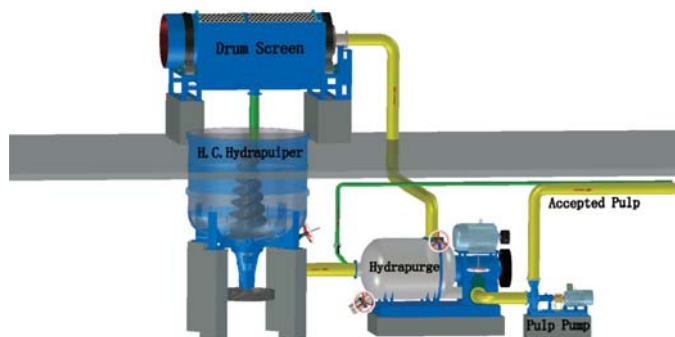

ZDSG H.C. Hydrapulper

Application&Feature

1. Mainly used for separating waste paper and ink under high consistency in waste paper deinking process.
2. Special spiral rotor effectively promote the circulation and rollover of pulp, reinforce friction between fibers. Finally achieve gentle pulp under high consistency, impurities will not be broke in the process of fiber relief and deinking.
3. Dealing with 12%-18% high consistency pulp, effective chemical mixture and friction between fibers under high consistency make the ink particle separate from the surface of fiber fully.
4. Compact structure, convenient operation and maintenance.

Main Specification

Type	ZDSG5	ZDSG10	ZDSG15	ZDSG20	ZDSG25	ZDSG30	ZDSG35
Normal Volume(m ³)	5	10	15	20	25	30	35
Consistency (%)	10-15						
Production Capacity(t/d)	20-25	40-50	60-70	80-100	130-185	160-225	185-260
Motor Power(kw)	110	220	315	400	450	500	560



ZDSZ Series M.C. Hydrapulper

Application&Feature

1. Mainly used for pulping wood pulp and other clean raw materials.
2. Pulp consistency can reach 5%-8%.
3. Energy-saving S type rotor, adjustable gap between rotor and sieve plate guarantee the pulping effect.

Main Specification

Type	ZDSZ24	ZDSZ25	ZDSZ26	ZDSZ27	ZDSZ28	ZDSZ29	ZDSZ30	ZDSZ31	ZDSZ32
Normal Volume(m³)	10	15	20	25	30	40	50	70	90
Consistency (%)	5-8								
Production Capacity(t/d)	40-60	60-90	80-120	120-170	140-190	220-290	300-400	450-600	600-800
Motor Power(kw)	90	132	160	200	250	315	400	630	800



ZDS Series Vertical Hydrapulper

Application&Feature

1. Used for breaking pulp board, damage paper, waste paper and etc.
2. Energy-saving VOKES rotor strengthens hydraulic circulation and fiber relief, continuously pulping, low energy consumption.

Main Specification

Type	ZDS23	ZDS24	ZDS25	ZDS26	ZDS27	ZDS28
Normal Volume(m³)	5	10	15	20	25	30
ONP Φ6-Φ10	25-35	45-60	65-80	85-100	110-130	130-150
OCC Φ10-Φ16	35-50	60-80	80-100	100-130	130-150	150-170
AOCC	Φ6-Φ10	15-25	30-40	45-60	60-75	85-95
	Φ10-Φ16	25-35	40-50	60-75	75-90	95-110
Chemical Wood Pulp: Batch	13-18	25-30	40-50	50-60	65-85	80-100
Motor Power(kw)	55	110	160	185	220	250



ZSF Series Hydrapurger

Application&Feature

1. Mainly used for removing light and heavy impurities of waste paper pulp in the process of waste paper pulping.
2. Energy-saving VOKES rotor can avoid breaking impurities.
3. Impurities can be discharged according to different specific gravity.
4. Excellent design of shell structure makes strong ability to collect impurities. Early remove impurities, reduce the pulper and following equipment burden.
5. Open front cover makes it easier to maintain.
6. Automatic control system make the process of impurities removal convenient and reliable.

MAIN Specification

Type	ZSF1	ZSF2	ZSF3
Normal Volume(m ³)	1.2	3	5
Consistency (%)		4-5	
Production Capacity(t/d)	35-45	60-80	100-140
Motor Power(kw)	45	75	132



ZST Series Drum Screen

Application&Feature

1. Mainly used for removing large light impurities in waste paper pulping system.
2. Optimized helical blade and water spray system ensure the high purity of impurities and less loss of fiber.
3. Simple structure, reliable operation and easy maintenance.
4. Effective screening, low motor power.

Main specification

Type	ZST1A	ZST2A	ZST4A
Diameter Of Screen Drum(mm)	Φ1000	Φ1500	Φ2000
Passing Capacity (l/min)	3000-5000	6000-8000	9000-12000
Motor Power (kw)	4	5.5	11




ZTS Series Ragger

Application&Feature

1. Mainly used for removing various kinds of twisting impurities in slurry like iron wire, string, plastic, cotton yarn, etc.
2. Motor directly connect with reducer, adjustable rotational speed, stable operation, smooth running.
3. Pinch roller of ragger is controlled by air cylinder, which can make sure the rope is pulled out with constant speed.

Main specification

Model Type	ZTS1
Speed(m/h)	0-60
Motor Power(kw)	4



Rope Cutter

Application&Feature

1. Used for cutting off the rope from ragger.
2. Longer moving route of cutter can avoid rope getting stuck.
3. Double hydraulic cylinders makes it has a strong cutting ability.

Main specification

Type	QSI-2
Working Pressure (mpa)	25
Hydraulic Cylinder Force(T)	2×50
Cutter Route (mm)	850
Pump Station Motor Power(KW)	11
Oil Tank Volume(L)	100



Grapple

Application&Feature

1. Mainly used for grappling heavy and large impurities from sediment well.
2. Four "petal" is air pressure type operation.

ZSC Series High Density Cleaner

Application&Feature

1. Mainly applied to remove all kinds of heavy impurities in paper pulp, like staples, stones, glasses, etc.
2. Volute Pulp inflow chamber, the eddy ability is strong and low pressure area subarea is obvious. This makes accepts and impurities separate thoroughly.
3. Wear resistance ceramics cone, long service life.
4. Specially designed long cone has small taper angle and fine cleaning efficiency.
5. Equipped with PLC control cabinet, convenient and easy to control, sufficiently discharging impurities.



Main Specification

Type	ZSC2	ZSC3	ZSC4	ZSC5	ZSC6	ZSC7
Nominal Size	1000	2000	3500	5000	6500	9000
Throughput (l/min)	900-1400	1800-2600	3000-4500	4500-5800	5800-7500	8000-12000
Concentration Of Input Pulp (%)	2-5					
Pressure Of Input Pulp (mpa)	0.15-0.35					
Pressure Of Output Pulp (mpa)	0.1-0.25					
Pressure Of Backwash Water (mpa)	Pressure of Input pulp +0.02Mpa					
Discharging Mode	Manual/Auto/Intermittence/Continuous					



ZDFD Series Single Effect Fiber Separator

Application&Feature

1. Mainly used for secondary breaking and screening of waste paper pulp, meanwhile, separating the light and heavy impurities from the pulp. It also can be used as tail pulp treatment equipment.
2. Specially designed impeller can break fiber effectively and it is good to separate and remove light and heavy impurities.
3. Automatically discharge according to requirement, run reliably.

Main specification

Type	ZDFD2	ZDFD3	ZDFD4	ZDFD5	ZDFD6	ZDFD7
Capacity(t/d)	50-70	80-120	180-250	280-360	300-400	400-500
Concentration Of Input Pulp (%)	2-4					
Pressure Of Input Pulp(mpa)	0.15-0.20					
Pressure Difference(mpa)	0.03-0.05					
Power Of Motor(kw)	45	55	75-90	160	200	280



ZDF Series Single Fiber Separator

Application&Feature

1. Mainly used for secondary breaking and screening of waste paper pulp, meanwhile, separating the light and heavy impurities from pulp. It also can be used as tail pulp treatment equipment.
2. Specially designed cone structure can better break fiber, and can effectively separate and remove light and heavy impurities.
3. Automatically discharge according to requirement, run reliably.

Main specification

Type	ZDF2	ZDF3	ZDF4	ZDF5
Diameter Of Blade (mm)	Φ560	Φ720	Φ980	Φ1100
Product Capacity(t/d)	30-50	60-80	100-180	165-265
Pressure Of Input Pulp(mpa)	0.2-0.3			
Concentration Of Input Pulp (%)	2.5-4.0			
Power Of Motor(kw)	37	55	90	110




PZ Series Reject Separator

Application&Feature

1. Used for fiber relief and impurities separate for tailing in the coarse screen system for waste paper pulp.
2. Specially designed rotor produce centrifugal force in the process of high-speed rotation and backwash water can relief pulp effectively, achieve pulp and impurities easily separate.
3. Closed Working condition, clean environment.
4. Openable upper cover makes maintenance easy and convenient.

Main Specification

Type	PZ1	PZ2
Capacity (t/d)	15-30	30-60
Motor Power (kw)	22	30-37

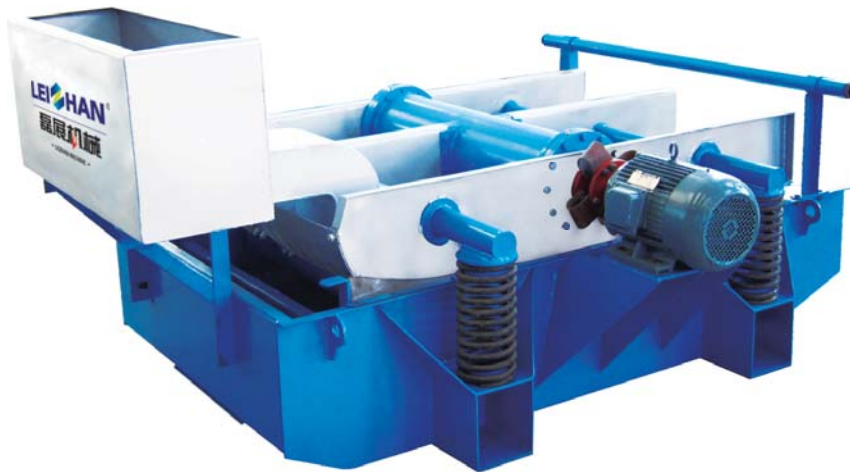

ZSK Series Vibrating Screen

Application&Feature

1. Used for screening and removing various impurities in pulp suspension.
2. Specially designed air seal chamber makes self-cleaning ability of sieve plate very strong.
3. Perfect screening effect, stable running, low noise, easy maintenance.

Main Specification

Type	ZSK1	ZSK2	ZSK3
Screen Area (m ²)	1	2	3
Product Capacity Of Hole Screen (t/d)	7.5-25	12-50	25-75
Product Capacity Of Slot Screen (t/d)	3.5-7.5	7-15	11-25
Input Pulp Concentration Of Hole Screen (%)		1.0-1.5	
Input Pulp Concentration Of Slot Screen (%)		0.5-0.8	
Motor Power (kw)	2.2	3	4



KH Series Low Density Cleaner

Application&Feature

1. Mainly used for removing heavy impurities in the pulp like gravel, scrap iron, dust and large ink particles.
2. Divided design, the cleaners can be divided into 3-4 parts, which make it easier for disassembly, assembly and replace.
3. Different deslagging ways: open and closed type impurity discharge to meet different working environment.
4. The bottom of cone adopts wear-resistant ceramics. It ensures the stable deslagging and long service life.

Main Specification

Type	KH-400	KH-600	KH-800	KH-1000	KH-1500
Rate Passing Capacity Of Single Equipment(l/min)	400	600	800	1000	1500
Inlet Consistency (%)	0.3-1	0.3-1.2	0.4-1.2	0.4-1.5	0.4-1.5
Pressure Of Inflow Pulp(mpa)	0.2-0.4	0.2-0.4	0.3-0.4	0.3-0.4	0.3-0.4
Diameter Of Deslagging Outlet(mm)	4-10	6-12	6-14	6-18	6-18



ZNS Series M.C. Pressure Screen

Application&Feature

1. Mainly used for coarse and fine screening of various waste paper pulp.
2. Many rotor blades, no winding, high efficient and energy-saving rotary rotor.
3. The machine can screen pulp normally under quite high consistency(2.5-4%). It reduces the amount of water cycle and system energy consumption in production process.
4. Heavy impurities discharge pipe makes sure the screen basket runs safely.
5. Advanced structure, sturdy and durable, convenient disassembly and assembly , low energy consumption, less loss of fiber.
6. Easy to operate, less malfunctions for continuous working, less maintenance cost.
7. Automatic oil injection device can reduce maintenance.
8. Seal water flow automatic detection alarm device makes sure the system runs safety.
9. Interlock system ensures the service life of equipment.

Main Specification

Type	ZNS0.3	ZNS0.6	ZNS0.9	ZNS1.2	ZNS1.5	ZNS2	ZNS2.5	ZNS3	ZNS4	ZNS6	
Screen Area(m ²)	0.3	0.6	0.9	1.2	1.5	2	2.5	3	4	6	
Screen Hole Size(mm)	φ1.6-φ3.5										
Screen Sl t Size(mm)	0.10-0.55										
Production Capacity (t/d)	Screen Hole(t/d)	50-80	90-160	135-250	180-320	200-380	260-500	300-600	400-700	500-1000	800-1500
	Screen Slot(t/d)	30-50	60-100	90-150	120-190	140-230	200-300	250-400	300-450	350-730	500-1100
Inlet Pulp Consistency (%)	1-4										
Motor Power(kw)	22-55	30-75	37-90	45-110	55-132	75-160	90-200	90-220	132-280	250-400	



FQJ Light Impurity Separator

Application&Feature

1. Used for dealing with light impurities and tailing in coarse screening section.
2. The main body is an inverse conical design, concave top structure, can form a strong vortex, forming a low pressure area in the top center and getting the light impurities and discharge them outside effectively.
3. Pulp outflow chamber of rotor is higher than undersurface of shell, forming a low pressure area around the rotor to collect heavy impurities. Under centrifugal force, the heavy impurities are thrown to the outermost of eddy and deposit in the groove that is outside the sieve plate for discharging. At the same time, it will reduce the wear to cutter and sieve plate, prolong the service life of them.

Main Specification

Type	FQJ0.4	FQJ0.8	FQJ2
Norminal Volume(m ³)	0.4	0.8	2
Treating Consistency(%)	0.5-2		
Capacity Of Production(t/d)	35-45	65-85	110-140
Power Of Motor(kw)	30	55	110



UV Series Up-flow Pressure Screen

Application&Feature

1. Mainly used for coarse and fine screening of waste paper pulp.
2. Adopt up-flow structure: pulp inflow from bottom, heavy impurities are discharged from bottom and light impurities from top. It shortens the dwell time of impurities in the screening area and avoid the abrasion to rotor and screen basket. So prolong the rotor and screen basket service life.

Main Specification

Type	UV0.5	UV1.2	UV2.0	UV3.0	UV4.0	UV5.0
Area Of Screen (m ²)	0.5	1.2	2.0	3.0	4.0	5.0
Concentration Of Inflow And Output Pulp (%)	0.2-5.0					
Size Of Screen Hole (mm)	0.15-0.55					
Size Of Screen Slot(mm)	1.2-5.0					
Product Capacity(t/d)	20-30	40-60	80-100	100-250	160-450	200-500
Equipping Power(kw)	22/37	45/75	75/110	90/132	160/220	185/315



NLS Inflow Pressure Screen

Application&Feature

1. Small motor power, high production capacity, energy saving.
2. Inflow structure, low pulse, good effect of homogenate.
3. No gaskets companion flange pulp outlet, inwall is polished. Seamless connection of flow pipeline, no fiber hitching.
4. Automatic oil injection device, seal water detection alarm device ensure the safe running of equipment and reduce maintenance.
5. Advanced structure, sturdy and durable, convenient disassembly and assembly, simple operation, less malfunctions for continuous working, low maintenance cost.

Main Specification

Type	NLS0.6	NLS1	NLS1.5	NLS2	NLS3	NLS4	NLS5	NLS6	NLS7	
Screen Area (m ²)	0.6	1	1.5	2	3	4	5	6	7	
Concentration Of Input Pulp(%)	0.4-0.8									
Production Capacity (t/d)	Screen Hole(t/d)	30-60	70-130	110-160	140-260	250-400	260-520	350-600	420-700	500-900
	Screen Slot(t/d)	25-45	55-80	80-120	100-160	150-300	180-320	220-400	260-480	350-600
Pressure Of Inflow Pulp(mpa)	0.1-0.4									
Motor Power (kw)	7.5-15	22	30	37	45	55	75	90	110	



ZNP Series Disc Thickener

Application&Feature

1. Used to wash and thicken for low consistency slurry.
2. Combined disc type filter drum increases the filter area greatly. Less space requirement, but large production capacity.
3. Adopt stainless steel filter screen, long service life.
4. Reasonable structure for pulp cleaning and stripping. Filter screen is not easy to block. Dewatering capacity is good .

Main Specification

Type	ZNP2508	ZNP2510	ZNP2512	ZNP2514	ZNP2516	ZNP3510	ZNP3512	ZNP3514	ZNP3516
Diameter Of Disc(mm)	Φ2500				Φ3500				
Amount Of Disc(n)	8	10	12	14	16	10	12	14	16
Nominal Area(m ²)	60	75	90	105	120	150	180	210	240
Concentration Of Input Pulp (%)	0.8-1.2								
Concentration Of Output Pulp (%)	3.5-4.5								
Processing Capacity ONP(t/d)	0.9-1.2t/(m ² :d)								
Processing Capacity AOCC(t/d)	1.5-2.4t/(m ² :d)								
Motor Power(kw)	11		15		18.5		22		30



ZDP Series Double Disc Refiner

Application&Feature

1. Used for beating and improving the beating degree of pulp to satisfy the papermaking demand.
2. It can be equipped with various tooth refiner plate. Suitable various raw materials like wood pulp, chemimechanical pulp, chemical pulp and waste paper pulp.

Main Specification

Type	Φ380	Φ450
Diameter Of Plate(mm)	380	450
Product Capacity(t/d)	6-20	8-60
Concentration Of Input Pulp (%)	2-5	3-5
Pressure Of Input Pulp(mpa)	0.1-0.2	0.15-0.2
Motor Power(kw)	37-55	75-90-110



DD Series Double Disc Refiner

Application&Feature

1. Mainly used for pulping, improving slurry beating degree to meet the paper making needs.
2. It can be installed various tooth refiner plates. Suitable various raw materials such as wood pulp, mechanical pulp, chemical pulp, waste paper pulp etc.
3. Adopt constant power control system , beating effect is stable.
4. Accurate retract mechanism, easy to control, the beating effect is good.

Main Specification

Type	DD550	DD600	DD660
Diameter Of Plate(mm)	Φ550	Φ600	Φ660
Product Capacity(t/d)	10-100	12-150	15-200
Concentration (%)		3-5	
Motor Power(kw)	160-250	185-315	220-500



ZDJ Series Claffin Refiner

Application&Feature

1. Mainly apply for pulping, which can be used with double disc refiner in series.
2. With features of long refining area, fully process finer, strong ability to cut fiber.
3. Rotor and stator have variety toothed. Suitable various raw materials.

Main Specification

Name	Parameter
Size Of Rotor(mm)	Φ350
Taper Degree Of Gear Ring(°)	60
Concentration Of Input Pulp (%)	2-5
Product Capacity(t/d)	20-30
Motor Power(kw)	55
Speed Of Motor(r/min)	970




ZM Series Conical Refiner

Application&Feature

1. Primarily apply for continuously pulping wood pulp, mechanical pulp, cotton pulp, waste paper pulp etc. Improving the beating degree, which can be used with double disc refiner in series.
2. With features of long refining area, fully process finer, strong ability to cut fiber.
3. Shell's lined is stainless steel for improving service life.
4. Adopt constant power control system, the beating effect is stable.
5. Rotor and stator have various tooth. Suitable various raw materials.

Main Specification

Rotor Size(mm)	Φ450	Φ460
Operation Concentration (%)	3-5	3-5
Product Capacity(t/d)	20-60	30-150
Motor Power(kw)	110	132-315

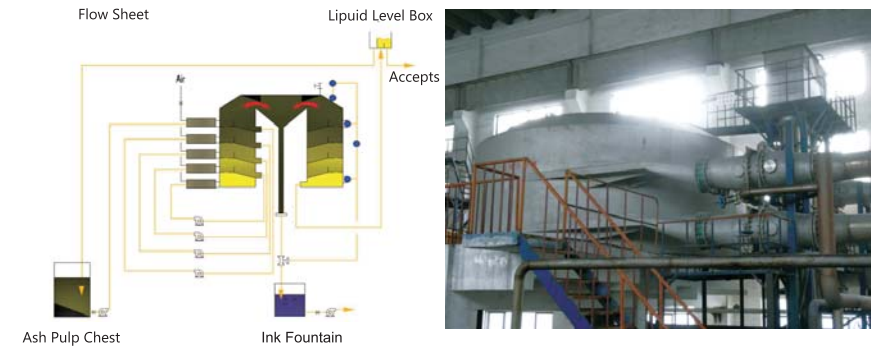

ZFM Flotation Deinking Machine

Application&Feature

1. Mainly applied to deink recycled pulp, it can effectively remove the ink, light impurities and stickies etc.
2. High efficient flotation, high consistency scum, less fiber loss.
3. Easy maintenance, low power consumption, low operation cost.
4. Only one set can achieve 4-5 stages of flotation, has advantages of less occupied area.

Main Specification

Type	ZFM1	ZMF2	ZFM3	ZFM4	ZFM5	ZFM6	ZFM7	ZFM8	ZFM9	ZFM10
Throughout Capacity (m³/h)	256	400	512	624	800	976	1152	1344	1456	1600
Layers	3-5									
Consistency (%)	1.1±0.1									
Production Capacity (%)	55-65	85-100	110-130	130-160	170-210	210-250	240-300	290-350	310-380	340-420
Consistency Of Ink(%)	2-3									



ZNG High-speed Stock Washer


Application&Feature

1. Mainly used for washing and concentrating in various domestic and overseas waste recycled pulp, chemical pulp before or after bleaching. Removing ink particles, fillers and other small impurities from the slurry with high efficient.
2. High efficiency of impurity prolapse, high efficiency dewatering, very clean after wash the slurry.
3. Less occupied area, large production capacity, low power consumption.

Main Specification

Type	ZNG10	ZNG15	ZNG20	ZNG25	
Working Width(mm)	1000	1500	2000	2500	
Concentration Of Input Pulp (%)	0.8-1.5				
Concentration Of Output Pulp (%)	8-15				
Production Capacity(t/d)	MOW(t/d) (AOCC37#)	40-70	55-100	70-130	100-180
	ONP(t/d)	30-50	40-70	50-90	60-110
Ash Removal(%)	≥90				
Power Of Main Motor(kw)	30	37	55	75	
Motor For Screw Conveyor(kw)	5.5	5.5	7.5	7.5	

Dispersion System

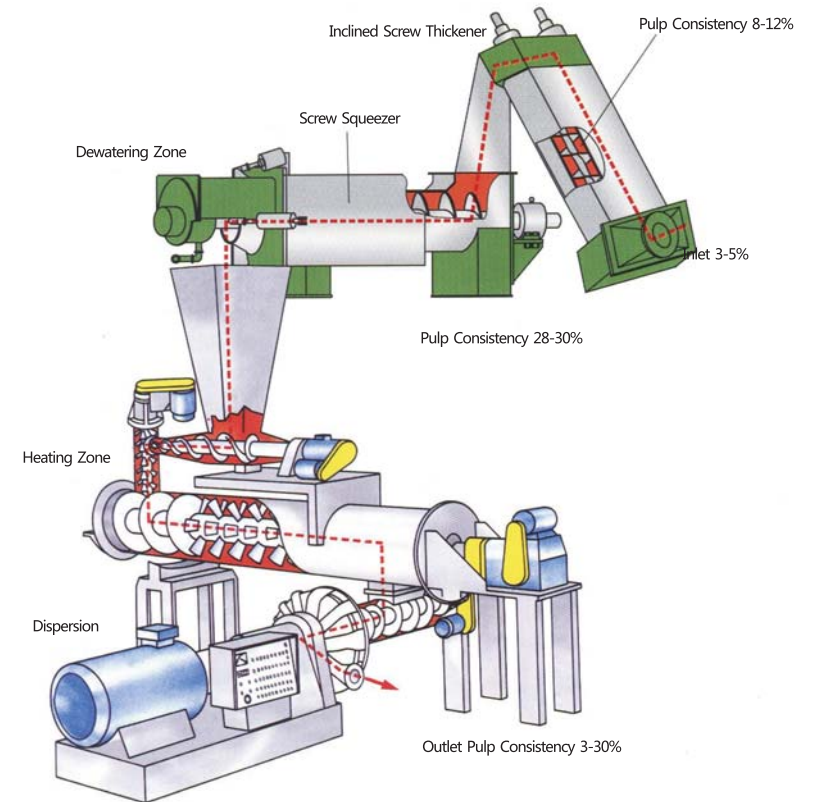



ZNX Series Inclined Screw Thickener

Application&Feature

1. Mainly used for washing and thickening all kinds of paper pulp.
2. Special brush which is synchronized running with screw can prevent filter pore from blocking, good dehydration effect.
3. Dehydration by gravity, low power consumption.

Main Specification

Type	ZNX1	ZNX2	ZNX3	ZNX8	ZNX9	ZNX12
Nominal Filtrating Area(m ²)	1 × 1	1 × 2	1 × 3	1.5 × 2	1.5 × 3	2 × 3
Concentration Of Input Pulp (%)	3-4					
Concentration Of Output Pulp (%)	10-14					
Production Capacity (t/d)	12-20	25-40	35-60	40-60	60-90	100-130
Motor Power (kw)	4	4 × 2	4 × 3	7.5 × 2	7.5 × 3	11 × 3



ZNJ Series Screw Press Washer

Application&Feature

1. Mainly suitable for washing and thickening all kinds of paper pulp.
2. For screw shaft, the compression ratio is axially distributed reasonably, thickening effect is good.
3. In discharge side, fitted with inner dewatering assembly with holes, which can efficiently secure uniformity of dewatering of inside and outside pulp layer.
4. Pneumatic back-push assembly can guarantee the stability and adjustment of discharge consistency.
5. Special screw structure in outlet, easy to maintain.

Main Specification

Type	ZNJ12	ZNJ13	ZNJ14	ZNJ15	ZNJ17	ZNJ16	ZNJ18
Standard Of Screw(mm)	Φ400	Φ450	Φ600	Φ700	Φ800	Φ900	Φ1100
Concentration Of Input Pulp (%)	10-14			8-12			
Concentration Of Output Pulp (%)	25-35						
Production Capacity(t/d)	40-50	60-80	100-150	150-200	200-300	280-350	350-450
Motor Power(kw)	30	37	55	110	132	200	280



ZRP Series Disc Disperser

Application&Feature

1. Mainly used to disperse the stickies, grease, wax, plastic, rubber and ink particles and other hot melt impurities from the paper pulp.
2. Reasonable disc tooth structure ensure an effective dispersion to gooey, ink particles, etc.
3. Automatic lubrication system ensures a stable running of equipment.
4. Matching with different fluted disc according to the different type of stock.

Main Specification

Type	ZRP1	ZRP2	ZRP3
Nominal Diameter (mm)	Φ450	Φ710	Φ1050
Concentration Of Input Pulp (%)	25-30		
Concentration Of Output Pulp (%)	4-12		
	25-30		
Treating Temperature(℃)	110-120 (AOCC)		
	80-90(ONP)		
Production Capacity (t/d)	30-70	80-300	280-600
Power Of Main Motor(kw)	110-200	280-800	630-1250
Power Of Feeding Screw(kw)	5.5	5.5-11	11-18.5
Power Of Plug Screw(kw)	15	22-45	55-90
Power Of Fluffer(kw)	5.5	5.5-11	15-18.5
Power Of Heater(kw)	7.5	7.5-22	30-45




ZDR Series Kneader

Application&Feature

1. Mainly used to disperse the stickies, grease, wax, plastic, rubber and ink particles and other hot melt impurities from the paper pulp.
2. Special designed stator and rotor can effectively knead stock as well as disperse hot melt impurities, at the same time can't reduce the freeness of the stock.
3. Automatic control of discharging can guarantee slurry dispersed evenly.

Main Specification

Type	ZDR2	ZDR3	ZDR4	ZDR5
Nominal Diameter (mm)	Φ500	Φ600	Φ700	Φ800
Consistency (%)	≥28			
Treating Temperature(℃)	90-100			
Production Capacity (t/d)	30-45	60-90	100-150	160-220
Motor Power(kw)	110	185	250	315

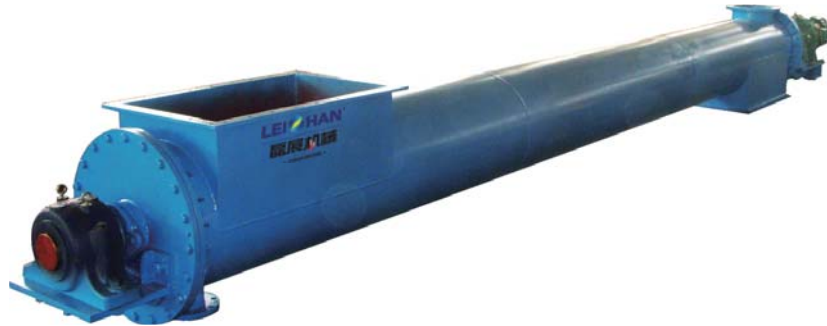

ZLS Series Heating Screw Conveyor

Application&Feature

1. Mainly used for conveying the concentrated pulp into the high consistency mixer, at the same time heating the slurry and adding bleach solution.
2. Optimization of the spiral blade can ensure the high consistency pulp convey, while keep loose state, which is advantage to the pulp evenly heating.
3. Reasonable heating device row with special designed anti-push spiral blades can assure slurry uniform heating while save the steam consumption.
4. Frequency control can be easily adjusted to match with other capability of equipment.

Main Specification

Type	ZLS1	ZLS2	ZLS3	ZLS4
Diameter(mm)	Φ500	Φ600	Φ700	Φ800
Consistency (%)	32-35			
Production Capacity (t/d)	30-70	80-120	140-170	180-230
Motor Power (kw)	7.5	15	22	30



ZPT Series H.C. Bleaching Tower

Application&Feature

1. Mainly used for high concentration of hydrogen peroxide bleaching of deinking pulp, groundwood pulp or other kinds of pulp.
2. Cone structure of tower reduce the possibility of stock bridging.
3. Special inner structure ensures pulp fall uniformly, which unifies pulp falling time and bleaching time.
4. At the bottom dilution function achieve high consistency bleaching, low consistency conveying. It makes the process of stock preparation simpler.

Main Specification

Nominal volume (m ³)	50	70	100	150
Pulp Consistency(%)	28-32			
Bleaching Temperature(°C)	60-70			
Bleaching Time(min)	60-90			
Production Capacity(t/d)	50-80	80-120	120-170	150-260
Motor Power(kw)	30	30 × 2	37 × 2	37 × 2



ZPH Series Mid Consistency Mixer


Application&Feature

1. Mainly used in mid consistency bleaching section of stock preparation process, which fully mixes chemicals, steam and pulp.
2. Adopt triple-blade rotor which helps in working efficiently. High Speed rotation of rotor makes stock fluidization and destroys fiber structure, so that reaches the best mixing result.
3. Inner structure with spiral bar, avoiding stock detained in shell, reducing pressure losses.
4. The rotation direction of rotor is perpendicular to the flow direction of stock, preventing bleaching agents from education and overflowing and saves chemicals.
5. Directly connect after medium consistency pump, obviously energy saving.

Main Specification

Type	Specification	Proper Temperature (°C)	Consistency (%)	Working Pressure (Mpa)	Production Capacity (t/d)		Power Of Motor(KW)
					1000r/min	1500r/min	
ZPH21	Φ100	≤120	8-14	≤0.6	50-80	80-120	7.5-11
ZPH22	Φ150				160-170	160-260	11-22
ZPH23	Φ200				180-270	300-420	22-37

Flow Sheet

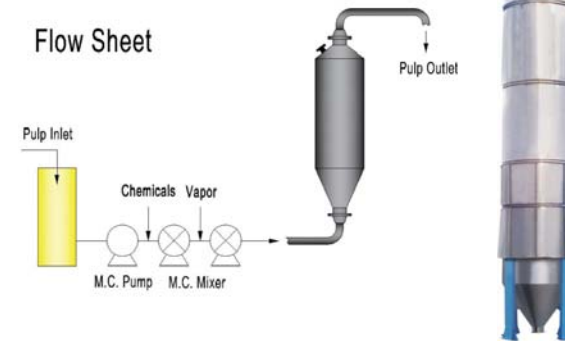

ZPT Series M.C. Bleaching Tower

Application&Feature

1. Mainly used in mid consistency bleaching section of stock preparation process, which fully mixes chemicals, steam and pulp.
2. Adopt triple-blade rotor which helps in working efficiently. High Speed rotation of rotor makes stock fluidization and destroys fiber structure, so that reaches the best mixing result.
3. Inner structure with spiral bar, avoiding stock detained in shell, reducing pressure losses.
4. The rotation direction of rotor is perpendicular to the flow direction of stock, preventing bleaching agents from education and overflowing and saves chemicals.
5. Directly connect after medium consistency pump, obviously energy saving.

Main Specification

Type	Specification (m ²)	Bleaching Temperature (°C)	Bleaching Consistency (%)	Bleaching Time (min)	Processing Capacity (t/d)	Diameter Of Tower (mm)	Height Of Tower (mm)
ZPT31	15	60	8-12	20-30	40-60	1600	9250
ZPT32	25				80-120	2000	9850
ZPT33	45				120-180	2600	10500



JB Series Agitator

Application&Feature

1. Mainly used to stir pulp cyclically in chest to maintain the pulp liquid in suspending condition, which ensure the pulp components even distribution.
2. Advanced blade design, strong thrust. It can be adjusted the angle according to the concentration of the slurry.

Main Specification

Model	JB500	JB600	JB700	JB750	JB850	JB1000	JB1150	JB1250	JB1350	JB1500	JB1800
Vane Diameter(mm)	Φ500	Φ600	Φ700	Φ750	Φ850	Φ1000	Φ1150	Φ1250	Φ1350	Φ1500	Φ1800
Consistency(%)	≤5										
Chest Volume(m ³)	20-50	30-60	35-70	40-75	50-85	70-110	80-120	90-140	100-150	120-180	150-230
Motor Power(kw)	5.5/7.5	5.5/7.5/11	7.5/11/15	7.5/11/15	11/15/18.5	15/18.5/22/30	18.5/22/30	22/30/37	30/37/45	37/45/55	45/55/75




HD Series Sludge Dewatering Machine

Application&Feature

Used to concentrate sludge in paper making industry, municipal engineering, etc.

Main Specification

Type	HD-1	HD-2	HD-3	HD-4	Note
Width Of Net (mm)	1500	2000	2500	3000	
Speed Of Belt (m/min)	1.5-8				
Concentration Of Input Pulp (%)	1.5-4				
Concentration Of Output Pulp (%)	20-30				
Pressure Of Washing Water(mpa)	≥0.5				
Quantity Of Mud (t/d)	110- 280	150-380	210-480	260-400	
Motor Power(kw)	2.2+1.1	3.0+1.5	4.0+2.2	5.5+2.2	

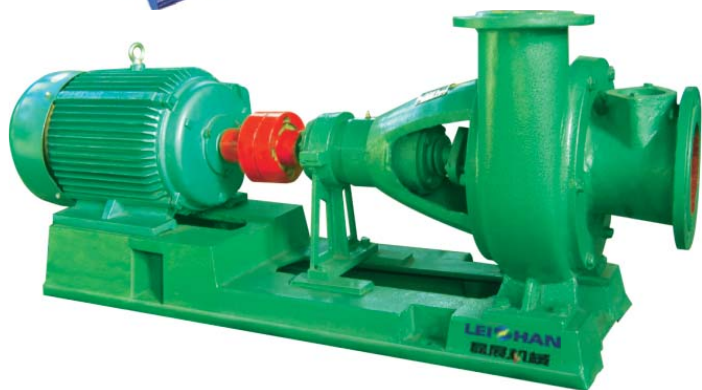

LXL-Z Series Two-phase Flow Pulp Pump

Application&Feature

Mainly used for transporting liquid or solid materials in paper making, coal, mine, electric power food, urban sewage industry, etc.

Main Specification


Type	Scope		Suction height (m)	Speed (r / min)	Efficiency (%)	Equipped with electric motor type and power	Medium volume concentration (%)	Impeller diameter (mm)
	flow rate (m³/h)	lifts (m)						
80LXLZ - 50 - 6	30-60	7-5	2.5	1420	68	Y100L-2.2	4-6	156
80LXLZ - 35 - 6	21-40	7-5		1400	68	Y90L-1.5		156
80LXLZ - 60 - 12	35-70	14-12	2.5	1440	65	Y112M-4	4-6	210
80LXLZ - 65 - 15	40-80	16-14		1440	65	Y132S-5.5		225
80LXLZ - 50 - 20	30-60	23-21	6	1440	60	Y132S-5.5	4-6	258
80LXLZ - 55 - 25	35-70	26-24		1440	60	Y132M-7.5		285
80LXLZ - 60 - 35	35-70	37-33	6	1460	60	Y160M-11	4-6	323
80LXLZ - 70 - 40	40-80	41-37		1460	60	Y160L-15		340
80LXLZ - 80 - 45	55-100	44-40		1460	60	Y180M-18.5		353
80LXLZ - 100 - 40	60-120	44-36		1470	60	Y180L-22		353
100LXLZ - 90 - 18	55-110	19-17	6	1440	70	Y132M-7.5	4-6	242
100LXLZ - 110 - 20	65-130	23-21		1460	72	Y160M-11		258
100LXLZ - 80 - 20	50-100	21-19	6	1440	68	Y132M-7.5	4-6	258
100LXLZ - 80 - 25	50-100	29-25		1460	68	Y160M-11		285
100LXLZ - 120 - 27	82-140	28.5-24.5	6	1460	68	Y160L-15	4-6	285
100LXLZ - 70 - 30	40-80	32-28		1460	60	Y160M-11		296
100LXLZ - 80 - 35	50-100	37-33	6	1460	60	Y160L-15	4-6	320
100LXLZ - 90 - 40	55-110	43-37		1470	60	Y180M-18.5		340
100LXLZ - 150 - 37	110-180	40.6-34.5		1470	68	Y180L-22		340
100LXLZ - 150 - 16	90-180	19-17		970	68	Y180L-15		358
100LXLZ - 160 - 30	95-190	32-28	6	1470	68	Y180L-22	4-6	310
100LXLZ - 180 - 35	110-220	37-32		1470	68	Y200L-30		330
100LXLZ - 200 - 40	120-240	43-37	6	1480	68	Y225S-37	4-6	350
100LXLZ - 130 - 11	80-160	12-9		970	65	Y160M-7.5		300
100LXLZ - 100 - 22	60-120	23-21	6	970	60	Y160L-11	4-6	385
100LXLZ - 130 - 45	80-160	49-43		1470	60	Y200L-30		365
100LXLZ - 140 - 50	85-170	55-48		1480	60	Y225S-37		390
100LXLZ - 200 - 55	120-240	58-51		1480	60	Y250M-55		399
100LXLZ - 260 - 45	160-300	50-41.5	6	1480	69	Y225M-45	4-6	390
100LXLZ - 200 - 52	135-270	55-46		1480	62	Y250M-55		399
150LXLZ - 160 - 15	95-190	15-12	6	970	75	Y160L-11	4-6	320
150LXLZ - 200 - 25	120-240	25.5-22.5		1470	75	Y180L-22		290
150LXLZ - 220 - 30	130-260	32-28	6	1470	75	Y200L-30	4-6	310
150LXLZ - 200 - 20	120-240	21.5-18.5		1470	75	Y180M-18.5		275
150LXLZ - 300 - 25	180-360	26.5-23	6	1470	75	Y200L-30	4-6	310
150LXLZ - 180 - 12	140-230	13-10		970	75	Y160L-11		320

Main Specification

150LXLZ - 200 - 14	120-240	13-11	5	970	70	Y160L-11	4-6	318
150LXLZ - 240 - 14	145-290	14-11	5	970	70	Y180L-15	4-6	323
150LXLZ - 210 - 16	125-250	15-13		970	70	Y180L-15		340
150LXLZ - 260 - 16	155-310	15-13		970	70	Y200L1-18.5		340
150LXLZ - 300 - 30	180-360	29.5-26		1480	72	Y225S-37		318
150LXLZ - 370 - 30	220-440	29.5-26		1480	72	Y225M-45		323
150LXLZ - 320 - 35	190-380	36-32		1480	72	Y250M-45		340
150LXLZ - 400 - 35	240-480	34-29		1480	72	Y250M-55		340
150LXLZ - 360 - 35	210-450	38.5-31.5		1480	72	Y250M-55		340
125LXLZ - 130 - 38	80-160	40-35.5	6	1470	68	Y180L-22		332
125LXLZ - 120 - 32	70-140	34-29		1470	68	Y180M-18.5		310
125LXLZ - 90 - 17	55-110	18-15.5		970	68	Y160M-7.5	4-6	340
125LXLZ - 200 - 35	130-230	40-31.5		1470	70	Y200L-30		340
150LXLZ - 300 - 15	180-360	16-14	5	970	75	Y200L1-18.5		350
150LXLZ - 280 - 12	170-340	13-11		970	75	Y180L-15		315
150LXLZ - 430 - 32	260-520	34-29		1480	75	Y250M-55		340
150LXLZ - 400 - 28	240-480	30-25		1480	75	Y225M-45	4-6	315
150LXLZ - 340 - 25	210-430	27-20		1480	75	Y225S-37		300
150LXLZ - 360 - 36	215-430	39-32		1480	75	Y250M-55		350
150LXLZ - 380 - 16	234-430	18.3-14.5		970	77	Y200L2-22		350
150LXLZ - 470 - 35	340-550	39.5-32		1480	75	Y280S-75		350
200LXLZ - 370 - 14	220-440	15-13	5	970	77	Y200L2-22	4-6	350
200LXLZ - 350 - 12	210-420	13-11		970	77	Y200L1-18.5		335
200LXLZ - 570 - 34	340-680	35-30		1480	77	Y280S-75		350
200LXLZ - 500 - 27	310-620	28-24		1480	77	Y250M-55		316
200LXLZ - 330 - 17	200-420	19-15		970	77	Y200L2-22		350
200LXLZ - 700 - 32	550-780	37-29		1480	77	Y280M-90		354
250LXLZ - 800 - 25	480-960	26.5-23	5	1480	76	Y280M-90		330
250LXLZ - 500 - 10	300-600	11-9		970	76	Y200L2-22	4-6	320
250LXLZ - 700 - 22	405-840	25-17		1480	76	Y280S-75		330
200LXLZ - 500 - 43	300-600	44-40		1480	75	Y280M-90		384
200LXLZ - 460 - 37	280-550	39-34		1480	72	Y280S-75	4-6	356
200LXLZ - 350 - 43	225-420	47-39		1480	72	Y280S-75		382
200LXLZ - 600 - 14	360-720	15-12	5	1480	76	Y225S-37		260
200LXLZ - 400 - 6	240-480	7-5		970	76	Y160L-11		260
200LXLZ - 500 - 12	300-660	15-9		1470	76	Y200L-30	4-6	260
200LXLZ - 330 - 5	240-400	6-4		970	75	Y160M-7.5		255
200LXLZ - 250 - 5	150-300	6-4		970	76	Y132M2-5.5		233

Main Specification

150LXLZ - 130-5	80-160	39-32	5	970	76	Y132S-3	4-6	223
250LXLZ - 1000-32	700-1150	34-28	1.5	1480	75	Y315M-132		357
250LXLZ - 935-28	655-1080	30-24		1480	75	Y315S-110	4-6	345
250LXLZ - 660-14	460-760	15-10		980	75	Y280S-45		357
250LXLZ - 620-12	435-715	13-8		980	75	Y250M-37		345
250LXLZ - 1000-50	700-1150	52-48	1.5	1480	78	Y355M1-220		426
250LXLZ - 950-45	665-1100	47-42		1480	78	Y315L2-200		410
250LXLZ - 900-40	630-1035	42-38		1480	78	Y315L1-160	4-6	390
250LXLZ - 850-36	600-980	38-33		1480	78	Y315M-132		370
250LXLZ - 660-22	460-760	24-20		980	78	Y315S-75		426
250LXLZ - 630-20	440-730	21-17		980	78	Y280M-55		410
250LXLZ - 600-18	420-690	19-15		980	78	Y280S-45		390
250LXLZ - 1300-32	910-1500	34-30	1.5	1480	78	Y315L2-200		370
300LXLZ - 1200-29	840-1380	31-27		1480	78	Y315L1-160		350
300LXLZ - 1150-26	800-1320	28-24		1480	78	Y315M-132		335
300LXLZ - 860-14	600-990	15-12		980	78	Y280M-55		370
300LXLZ - 820-13	575-940	14-11		980	78	Y280S-45		350
300LXLZ - 780-11	545-900	12-9		980	78	Y250M-37		335
300LXLZ - 1300-50	910-1500	52-48	1.5	1480	76	Y355L1-280		434
300LXLZ - 1200-42	840-1380	44-40		1480	76	Y355M1-220	4-6	410
300LXLZ - 1100-36	770-1270	38-33		1480	76	Y315L2-200		380
300LXLZ - 860-22	600-990	24-20		980	76	Y315M-90	4-6	434
300LXLZ - 800-18	560-920	19-16		980	76	Y315S-75		410
300LXLZ - 730-16	510-840	17-14		980	76	Y280M-55	4-6	380
350LXLZ - 1600-32	1120-1840	34-30	3.5	980	79	Y355L1-220		528
350LXLZ - 1500-28	1050-1725	30-26		980	79	Y355M2-185	4-6	495
350LXLZ - 1400-25	980-1610	27-23		980	79	Y355M1-160		467
350LXLZ - 1200-18	840-1380	20-16		740	79	Y315L2-110		528
400LXLZ - 2000-32	1400-2300	34-30	2.5	980	80	JS2-400M3-280		538
400LXLZ - 1840-27	1290-2110	29-25		980	80	Y355L1-220		495
400LXLZ - 1740-24	1220-2000	26-22		980	80	Y355M2-185		466
400LXLZ - 1510-18	1060-1740	20-16		740	80	Y315M2-132		538
200LXLZ - 500-70	300-600	73-66	5	1480	72	Y355L1-160		450
200LXLZ - 460-60	276-552	62-56		1480	72	Y315M-132	4-6	420
200LXLZ - 425-50	255-510	53-46		1480	70	Y315S-110		390

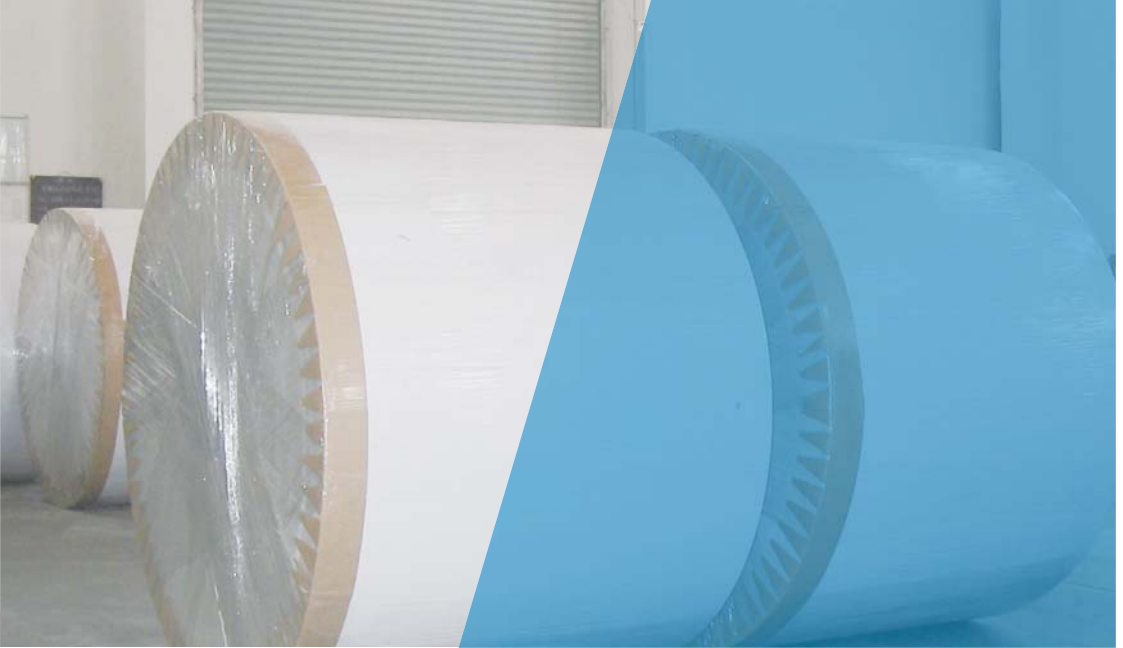

PAPER MACHINE

ZHENGZHOU LEIZHAN
TECHNOLOGY
PAPER MACHINERY CO., LTD



Kraft Liner Board Machine

Paper Grade	Kraft Paperboard
Trimmed Width(mm)	1880-5800
Basis Weight(g/m ²)	80-220
Operating Speed(m/min)	150-800
Production Capacity(t/d)	45-750



Corrugated Paper Machine

Paper Grade	High-strength Corrugated Paper
Trimmed Width(mm)	1575-5800
Basis Weight(g/m ²)	60-150
Operating Speed(m/min)	100-800
Production Capacity(t/d)	15-500



High-grade Cultural Paper Machine

Paper Grade	High-grade Fine Paper, Carbonless Paper
Trimmed Width(mm)	1880-3750
Basis Weight(g/m ²)	40-80
Operating Speed(m/min)	200-1200
Production Capacity(t/d)	20-270



Living Paper Making Machine

Paper Grade	High-grade Household paper
Trimmed Width(mm)	1575-3600
Basis Weight(g/m ²)	13-40
Operating Speed(m/min)	180-800
Production Capacity(t/d)	5-50



Coating Board Paper Machine

Paper Grade	Coating Board Paper
Trimmed Width(mm)	2400-6600
Basis Weight(g/m ²)	200-350
Operating Speed(m/min)	200-600
Production Capacity(t/d)	200-1400



Round Net Yarn Tube Paper Machine


Paper Grade	Yarn Tube Paper
Trimmed Width(mm)	1575-4800
Basis Weight(g/m ²)	350-1000
Operating Speed(m/min)	80-200
Production Capacity(t/d)	50-500



Overfeed Rewinder

Trimmed Width(mm)	1575-6000
Max Working Speed(m/min)	1500

Paper Machine Spare Parts

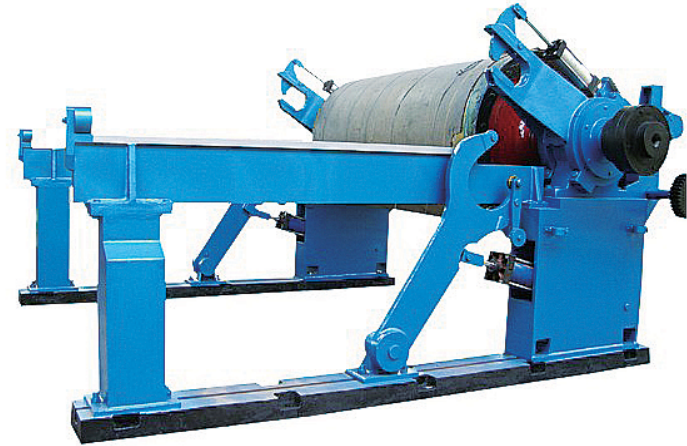

Reeling Machine



Sizing Machine



Calender

Paper Machine Spare Parts



Dryer Cylinder



Doctor Holder



Press Roll



Cylinder Mold




stretcher



Felt Leading Roll



Gear

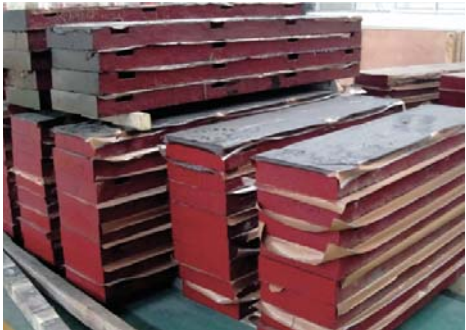

Foundation Plate



Felt



Boiler



Vacuum Pump



Doctor Blade

Part Of Customer List

Hubei Province

Hubei Enshi Chuyan Industry & trade Co., Ltd.
Hubei Suizhou Xingfengyuan Paper Co.,Ltd.
Hubei Chongyang Jinchang Paper Co.,Ltd.
Hubei Tongcheng Hongxing Paper Co.,Ltd.
Hubei Senyuan Paper Co.Ltd.
Hubei Laohekou Jinzanyang Paper Co.,Ltd.
Hubei Jingzhou Paima Paper Co.Ltd.

Hunan Province

Hunan Jingang Jinxiang Paper mill
Hunan Liuyang Huimei Paper Co.,Ltd.
Hunan Liuyang Lianxin paper Mill
Hunan Liuyang Shuntai Paper Co.,Ltd.
Hunan Liuyang Jingwei Paper Co.,Ltd.
Hunan Liuyang Chengtanjiang Xingda Paper Mill
Hunan Yueyang Huafeng Paper Co.,Ltd.
Hunan Chenzhou Jiahe Paper Co.,Ltd.
Hunan Pingjiang Qingyuan Paper Co.,Ltd.
Hunan Feiye Paper Co.,Ltd.

Hebei Province

Hebei Baoding Dingtai Paper Co.,Ltd.
Hebei Yutian Fuxing Paper Co.,Ltd.
Hebei Baoding Mancheng Tiaoshanying Fuli Paper Mill
Hebei Baoding Tiantian Paper Co.,Ltd.
Hebei Tangshan Yufeng Paper Co.,Ltd.
Hebei Mancheng Hengda Paper Co.,Ltd.
Hebei Baixiang Shenchang Paper Co.,Ltd.
Hebei Baoding Mancheng Gexin Paper Mill
Hebei Yutian Dazhong Baolai Paper Co.,Ltd.
Hebei Baoding Zhuqiang Paper Mill
Hebei Baoding New Urban Area Fuli Paper Mill
Hebei Gaocheng Hongjia Paper Product Factory
Hebei Baoding Dabei Paper Mill
Hebei Mancheng Hua'ao Paper Co.,Ltd.

Henan Province

Henan Hongfeng Paper Co.,Ltd.
Henan Hongwei Renewable Resources Technology Co., Ltd.
Henan Taikang Longyuan Paper Co., Ltd.
Henan Xinmi Hengfeng Paper Co.,Ltd.
Henan Zhengzhou Dongxin Paper Co., Ltd.

Henan Zhengzhou Kanghua Paper Co.,Ltd.
Henan Xinmi Hongyuan Paper Co., Ltd.
Henan Xinmi Longchang Paper Mill
Henan Zhengzhou Huafeng Industry & Trade Co., Ltd.
Henan Xinmi Dongsheng Paper Co., Ltd.
Henan Zhengzhou Yongguang Paper Co., Ltd.
Henan Yucheng Dongzhen Paper Co., Ltd.
Henan Lankao Guzhen Mamu Paper Mill
Henan Yongwei Security Co., Ltd.
Henan Dengfeng Fuxing Paper Co., Ltd.
Henan Tianhong Paper Co., Ltd.
Henan Puyang Yongsheng Paper Co., Ltd.
Henan Xinxiang Huaxin Paper Factory
Henan Anyang Xinwang Paper Co., Ltd.
Henan Linzhou Zhongle Paper Mill
Henan Hebi Jielian New Material Technology Co., Ltd.
Henan Xinmi Xinwin Paper Co., Ltd.
Henan Zhengzhou Shuofeng Paper Co., Ltd.
Guangdong Province
Guangdong Dongguan Jiulong Paper Industry
Guangdong Dongguan Liven Paper Industry
Guangdong Foshan Nanhai Lantian 'e Paper Co., Ltd.
Guangdong Shantou Piaohe Paper Industry
Fujian Province
Fujian Liansheng Paper Co., Ltd.
Fujian Jinjiang Youlanfa Paper Co., Ltd.
Jiangsu Province
Jiangsu Taicang Jiulong Paper Industry
Jiangsu Dongtai Jixing Paper Industry
Jiangsu Danyang Chuangfeng Paper Industry
Jiangsu Wuxi Shengli Paper Co., Ltd.
Jiangsu Hongze Yiyuan Paper Co., Ltd.
Jiangsu Yili Import and Export Trading Co., Ltd.
Jiangsu Yangzhou Guosheng Paper Product Co., Ltd.
Jiangsu Taizhou Hongyang Packaging Material Co., Ltd.
Jiangsu Haian Jinxin Paper Co., Ltd.
Jiangxi Province
Jiangxi Wanzai Jinke Paper Co., Ltd.
Jiangxi Shuanglin Paper Co., Ltd.
Jiangxi Huatai Industrial Co., Ltd.
Jiangxi Ga'an Liangshii Paper Industry.
Jiangxi Ga'an Ruiming Paper Co., Ltd.
Jiangxi Ga'an Ruiming Paper Co., Ltd.
Jiangxi Zhengshun Industrial Co., Ltd.
Jiangxi Yifeng Shihujian Paper Co., Ltd.
Jiangxi Guangchang Changsheng Recycling Paper Co., Ltd.
Liaoning Province

Liaoning Xingdong Paper Co., Ltd.
Liaoning Shenyang Siteleisi Paper Co., Ltd.
Liaoning Shenyang Hongda Paper Co., Ltd.
Liaoning Yingkou Fuxin Paper Co., Ltd.
Jilin Province
Jilin Zongheng Plastic Packaging Co., Ltd.
Heilongjiang Province
Heilongjiang Tsitsihar Yinhe Glass Paper Co., Ltd.
Heilongjiang Linhai Paper Industry
Heilongjiang Daqing Fengshou Packaging
Shanxi Province
Shanxi Yuncheng Jiangxian Xinlong Paper Co., Ltd.
Shanxi Yuncheng Ruima Paper Co., Ltd.
Shanxi Yuncheng Ziqiang Full Paper Mill
Shanxi Zetan Paper Co., Ltd.
Shanxi Changxin Packaging Paper Co., Ltd.
Shanxi Zeyu Packaging Paper Co., Ltd.
Shanxi Yingxian Shengyuan Paper Co., Ltd.
Shandong Province
Shandong Dezhou Juxin Paper Co., Ltd.
Shandong Kangquan Paper Co., Ltd.
Anhui Province
Anhui Linping Paper Industry
Anhui Hefei Hongtu Color Printing Co., Ltd.
Anhui Taihe Hongsheng Paper Industry
Anhui Benggu Sanlian Paper Industry
Shaanxi Province
Shaanxi Pucheng Yongfengliya Paper Co., Ltd.
Shaanxi Xingxiang Paper Co., Ltd.
Shaanxi Pucheng Longyuan Paper Co., Ltd.
Shaanxi Pucheng Qinxing Paper Co., Ltd.
Shaanxi Pucheng Dongxing Paper Co., Ltd.
Shaanxi Ankang Hengfeng Paper Co., Ltd.
Shaanxi Xingqing Dongfeng Paper Co., Ltd.
Yunnan Province
Yunnan Huanning Yufeng Paper Co., Ltd.
Yunnan Kunming Zhongxiang Paper Co., Ltd.
Yunnan Jianshui Chunqu Paper Co., Ltd.
Yunnan Jianshui Jianmintujiang Paper Co., Ltd.
Yunnan Yiliang Hongliang Brother Paper Co., Ltd.
Yunnan Yuxi Yanhe Paper Factory
Yunnan Jiangchuan Fengmao Paper Co., Ltd.
Yunnan Yuxi Rongjun Paper Co., Ltd.
Yunnan Shunda Paper Co., Ltd.
Yunnan Lufeng Tianhe Paper Co., Ltd.
Yunnan Kunming Chiju Paper Co., Ltd.
Guizhou Province

Guizhou Xingyi Jinxin Paper Co., Ltd.
Guizhou Guiyang Hengying Paper Co., Ltd.
Guizhou Dongyang Paper Co., Ltd.
Guizhou Guiding Baoda Paper Mill
Sichuan Province
Sichuan Shifang Renliang Paper Mill
Sichuan Lianda Paper Co., Ltd.
Sichuan Shifang Jinri Paper Co., Ltd.
SichuanN Yaoshan Hongyuan Paper Co., Ltd.
Sichuan Tongliang Tongxin Paper Co., Ltd.
Xinjiang Province
Xinjiang Aksu Jiangnan Hongda Paper Co., Ltd.
Xinjiang Korla Xinrui Paper Co., Ltd.
Xinjiang Urumchi Hongqi Paper Mill
Xinjiang Urumchi Wuxing Paper Co., Ltd.
Xinjiang Hebrew Paper Co., Ltd.
Xinjiang Urumchi Yuhua Paper Co., Ltd.
Xinjiang Urumchi Yumei Paper Co., Ltd.
Xinjiang Zhaosu Longbao Paper Co., Ltd.
Xinjiang Manas Yuxin Technology Co., Ltd.
Xinjiang Manas Xiangyun Chemical Fiber Co., Ltd.
xinjiang Urumchi Jiaruitiancheng Paper Product Co., Ltd.
xinjiang Gulin Paper Co., Ltd.
xinjiang Urumchi Shanrui Industry & Trade Co., Ltd.
Xinjiang Hengfa Paper Co., Ltd.
Foreign Customers
Bangladesh Makka Paper & Board Mills Ltd.
Ethiopia Barguba Trading Pvt. Co. Ltd
Indian Vardhi Hygiene Products Pvt. Ltd.
Indonesia PT.AGUNG BUMI LESTARI.
Iranian Meisam Kaghaz Co.
Iranian Pardis Kaghaz Pash Co.
Iranian Part Papyrus Co.
Malaysian EPPOR-PACK SDN.BHD.
Russia OU TRANSPACK EUROPE COMPANY
Saudi Arabian Al- Azman Factory
South African GMC INTERNATIONAL LTD
Syria Arab company for paper products LTD
Syrian Imprimerie Perfect Company
Turkey Kahramanmaraş Kagit Sanayi Ve Ticaret A.S.
Vietnam Fujiang Paper & Package Co., Ltd
Vietnam QUANG HUY JOINT STOCK COMPANY
Vietnam Sai Gon Mien Trung Paper Joint Stock Company
Zambian Metalko Industries Company Limited